

# SETUP GUIDE:


## SET UP GUIDE FOR:

*Complete before moving on to further instructions.*

**\*Follow all steps in order\***



- Spacer Legs can be used as a 2" or 4" height addition, or can be combined to make a 6" height addition.
- Hand tighten only.
- **Leave any unused parts and ALL paperwork, INCLUDING this guide with customer.**

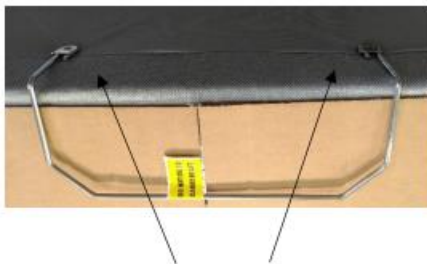

- Remove Retainer Screws/Washers to detach Retainer Bar
- Hand start Screws/Washers back into base
- Slide loops of retainer bar under the capture washer
- Hand tighten screws (Do NOT over tighten)

*\*FOR INDIVIDUAL BASE REMOTE & MOTOR SETUP:*


- Install batteries into remote.
- Plug base into power outlet.
- *Remote comes paired to the base already. No further action is required.*
- Base is ready to use.

*\*DUAL (2) BASE SET UP- TWO BASES TOGETHER TO WORK AS ONE USING A SYNC CORD:*

- Install batteries into both remotes.
- Plug both bases into a power outlet
- Connect SYNC CORD (provided) into both drive motors.
- Wait 10 seconds for syncing
- Bases are now ready to use.



# REMOTE

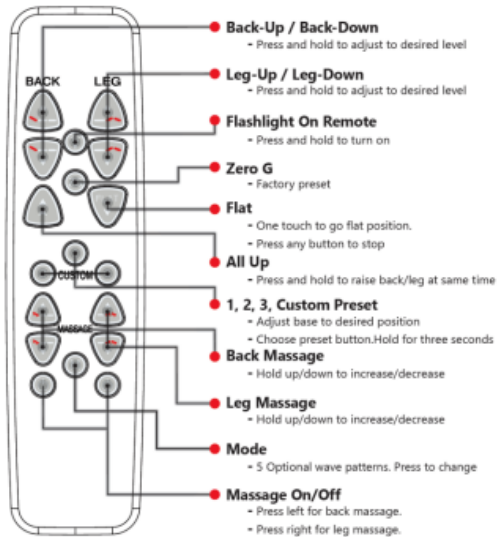

## TROUBLE SHOOTING

ISSUE:	FIX:
One base stopped working	Unplug base and check outlet for power Plug base to active outlet, wait 10 seconds and test base.
One base has intermittent activity	
Remote stopped working	Test flashlight function on remote. Check batteries
Dual/Split bases	
Neither base works after power outage	Check outlets for power
One remote stopped working both bases	
	Disconnect the sync cable from motor Unplug both bases. Wait 30 seconds Plug both bases back into power source Reconnect sync cable to both motors Wait 10 seconds to allow everything to reconnect Test both remotes

